



Commercial Kitchen Exhaust Hoods

- 430 stainless steel construction
- Max. temp.: 600°F
- UL and C-UL Listed
- NSF Standard 2 Certified

Type I wall canopy hoods feature integral 3" airspace for limited combustible clearance. For use on cooking equipment placed against a wall. Each includes aluminum baffle grease filters, incandescent light fixtures, ½-pt. grease cup, hanger brackets, and exhaust collars.

AIR SUPPLY PLENUMS


Effectively bring supply air back into the kitchen.

END SKIRTS

Designed to improve hood performance by reducing effects of small cross drafts. Set of 2, left and right.

DIGITAL TEMPERATURE INTERLOCKS

Provide Auto-On of exhaust and supply units when heat is present.

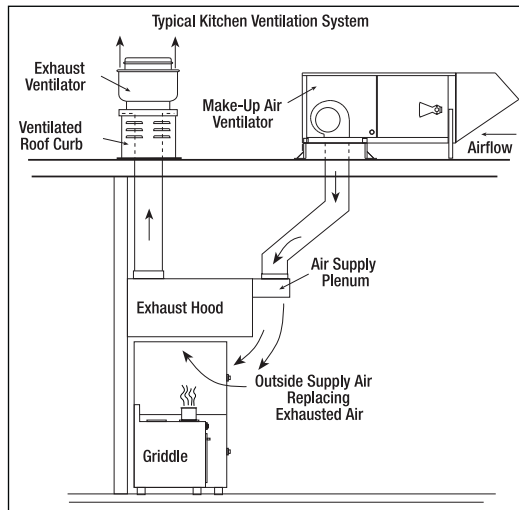

No. 6KWK8



No. 48C175

			EXHAUST HOOD		AIR SUPPLY PLENUM		END SKIRTS		DIGITAL TEMPERATURE INTERLOCK	
L	W	H	Item No.	\$ Each	Item No.	\$ Each	Item No.	\$ Each	Item No.	\$ Each
72"	54"	24"	6KWK8	2,208.00	6KWL2	606.50	6KWL6	467.50	48C175	650.00
96"	54"	24"	6KWK9	2,633.00	6KWL3	768.50	6KWL6	467.50	48C175	650.00
120"	54"	24"	6KWL0	3,106.00	6KWL4	932.50	6KWL6	467.50	48C175	650.00
144"	54"	24"	6KWL1	3,578.00	6KWL5	1,087.00	6KWL6	467.50	48C176	839.00
Replacement Temperature Interlock Sensor			—	—	—	—	—	—	48C177	299.75

NFPA 96 Required Accessories

VENTILATED ROOF CURBS

Ventilate hot exhaust ducts in commercial kitchen applications, protecting buildings and roof members. Galvanized steel curbs allow for quick ventilator installation and uniformity throughout the job. Fixed curbs are 18 ga.; adjustable curbs are 16 ga. Flat-flashing flange mounts directly to roof surface. Top flange surface is 1¾" wide.

GREASE COLLECTOR BOXES

Divert and collect heavy grease residue while protecting roof surface. Fasten directly to curb underneath ventilator. Each includes connection from ventilator drain to Grease Box. No. 48C174 meets NFPA 96 standards.

Curb Height (in.)	Outside Square (in.)	Inside Square (in.)	Flashing Flange (in.)	Use w/Dayton Ventilators	Item No.	\$ Each
Adjustable Ventilated Roof Curbs						
24	17½ to 22	14½ to 18	5	Having a Square Base From 19 to 20½"	4HX61	672.50
24	24 to 29	21 to 26	5	Having a Square Base From 25½ to 27½"	4HX62	825.00
18	31 to 46	28 to 43	5	Having a Square Base From 32½ to 44½"	4HX63	1,006.00
Fixed Ventilated Roof Curbs						
24	17½	14	4	Having a 19" Square Base	4HX54	347.00
24	20½	17	4	Having a 22" Square Base	4HX55	368.75
24	24½	21	4	Having a 26" Square Base	4HX56	397.50
24	28½	25	4	Having a 30" Square Base	4HX57	437.25
18	32½	29	4	Having a 34" Square Base	4HX58	475.50
18	40½	37	4	Having a 42" Square Base	4HX59	565.50
18	44½	41	4	Having a 46" Square Base	4HX60	585.00
H (in.)	L (in.)	W (in.)	For Use With		Item No.	\$ Each
Grease Collector Boxes						
6	12	5	All Dayton Roof-Mounted Centrifugal Upblast Ventilators		48C174	65.00
5	24	7	All Dayton Roof-Mounted Centrifugal Upblast Ventilators		4HX78	128.45
Hinge Kits						
—	—	—	Dayton Roof-Mounted Centrifugal Upblast Ventilators Having a 19" to 30" Square Base		4HX79	117.20
—	—	—	Dayton Roof-Mounted Centrifugal Upblast Ventilators Having a 34" Square Base		4YY84	430.25
—	—	—	Dayton Roof-Mounted Centrifugal Upblast Ventilators Having a 42" Square Base		4YY85	430.25
—	—	—	Dayton Roof-Mounted Centrifugal Upblast Ventilators Having a 46" Square Base		4YY86	465.25
Clean-Out Port Kit						
7	—	7	All Dayton Roof-Mounted Centrifugal Upblast Ventilators		3ATV9	260.00



HINGE KITS

Allow ventilators to swing back to expose the entire fan for cleaning and inspection, making maintenance easier. Each includes retaining cable and hardware kit.

CLEAN-OUT PORT KIT

Retrofits ventilator with a cleanout port for access to the ventilator wheel through the windband. Required for NFPA 96. Includes removable plug and hardware.



No. 4HX61



No. 4HX78



No. 4HX79



No. 3ATV9



Bird Screens

Protect fans from birds, small objects, and debris. Zinc-plated for durability; passed 24-hr. salt spray test. Concentric and precisely sized to eliminate rattling.

Use with Dayton Ventilators	Item No.	\$ Each
4HZ32 to 4HZ35, 5DVN6 to 5DVN9	4ZA27	27.60
1MBE6 to 1MBE8, 2RB65, 4HZ36 - 4HZ47, 4YY13 to 4YY15, 5DVL4 to 5DVL8, 5DVP8, 5DVP9, 5DVR2, 6KWH9, 6KWL2, 6KWL3, 16D522, 16D523	4YY78	28.25
1MBE9, 1MBF1, 2RB66, 3ATT8, 3ATT9, 3ATU1 to 3ATU3, 4HZ48 to 4HZ55, 4YY16, 4YY17, 5DVL9, 5DVN0, 5DVR3, 5DVR4, 5PVO6, 6KWH7, 6KWL0, 6KWL1, 16D524, 16D525	4YY79	35.95
1MBF2, 4HZ56 to 4HZ59, 4YY18, 4YY19, 5PVO7, 5PVO8, 3ATU4 to 3ATU8, 5DVN1, 5DVN2, 5DVR0, 5DVR1, 6KWH8	4YY80	52.25
3GY73, 3ATU9, 3ATV1, 4YY20, 5DVN3, 5DVN4	4YY81	71.70
3GY74, 3ATV2, 4YY21, 5DVN5, 16D526	4YY82	81.95
4YY22	4YY83	140.65

