



Stock No.
4YC92

Job Name:
Mark:

Submitted By:
Date:5/20/2024

Power Roof Ventilators

Axial Direct-Drive Downblast Supply Ventilator




Designed for situations requiring the steady supply of air under low to moderate static pressures. Fully rolled baffle bead for stability and ease of transport with spun aluminum hood construction. Galvanized steel venturi, inlet and supports.

- Maximum inlet air temperature: 120° F
- NEMA 1 junction box located in motor enclosure
- Optional NEMA 1 and 4 disconnects available
- UL/cUL 705 Listed for Power Ventilators
- Wall or roof mountable




Dayton Electric Mfg. Co. certifies that the ventilators shown herein are licensed to bear the AMCA seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirements of the AMCA Certified Ratings Program.

UL/cUL 705

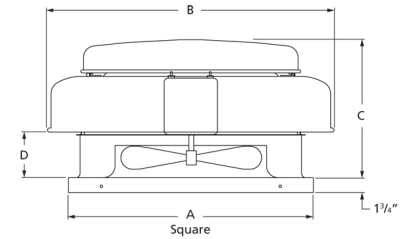

A	B	C	D
22 in	28 5/8 in	16 1/2 in	6 1/4 in

Performance Characteristics

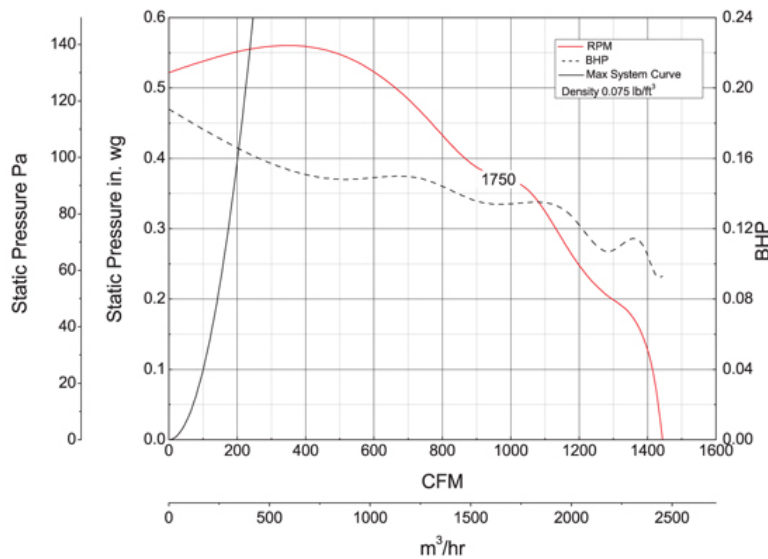

Construction Features

Impeller Diameter (Typ.)	12 in
Impeller Type	Propeller
Impeller Material	Aluminum
Number of Blades	4
Max Inlet Temp	120 °F
Warranty Length	1 Year

Motor Information

Motor Item Number	5BE52
Voltage	115
Hertz (Cycle)	60 Hz
Motor Phase	1
Motor Enclosure	Open Air-Over
RPM	1,725 rpm
Full Load Amps	4.2

Air & Sound Performance

Motor HP	Max BHP	Fan RPM	CFM @	0.000" SP	0.125" SP	0.250" SP	0.375" SP	0.500" SP
1/4	0.15	1750	CFM	1444	1400	1203	953	641
			Sones	11.4	11.6	12.2	15.1	15.8

Performance certified is for installation type A: Free inlet, Free outlet. Performance ratings include the effects of a birdscreen in the airstream. The sound ratings shown are loudness values in fan sones at 5 ft. (1.5 m) in a hemispherical free field calculated per AMCA Standard 301. Values shown are for installation type A: Free inlet hemispherical fan sone levels.