

## Centrifugal Direct-Drive Downblast Exhaust Ventilator




Designed to meet the general clean air exhaust requirements for industrial and commercial buildings. Features a fully rolled windband bead for increased stability and easy transport. Fresh outside air is drawn in under the motor cover to maximize motor life.

- Aluminum backward inclined, nonoverloading centrifugal wheel design
- Maximum inlet air temperature: 130° F
- NEMA 1 junction box located in motor enclosure
- Optional NEMA 1 and 4 disconnects available
- UL/cUL 705 Listed for Power Ventilators

AMCA Certified Ratings  
 Dayton Electric Mfg. Co. certifies that the ventilators shown herein are licensed to sell under the AMCA seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirements of the AMCA Certified Ratings Program.


UL/cUL 705  
**UL** US LISTED  
 E53236

CSA Certified Motor

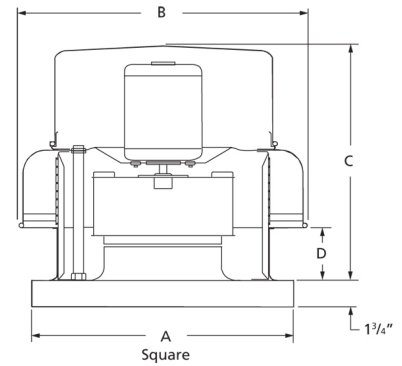

A	B	C	D
17 in	21 3/4 in	14 5/8 in	4 in

### Performance Characteristics

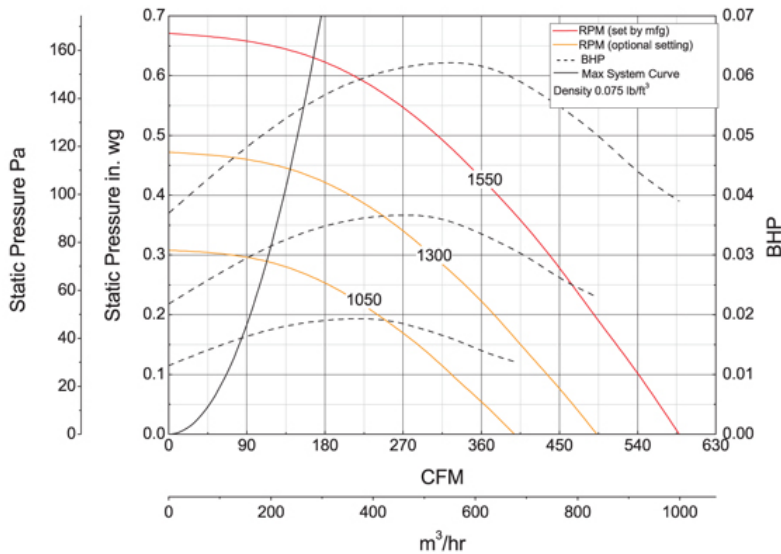

### Construction Features

<b>Impeller Diameter (Typ.)</b>	8 1/4 in
<b>Impeller Type</b>	Backward Inclined Centrifugal
<b>Impeller Material</b>	Aluminum
<b>Max Inlet Temp</b>	130 °F
<b>Warranty Length</b>	1 Year

### Motor Information

<b>Motor Item Number</b>	1AGF8
<b>Voltage</b>	115
<b>Hertz (Cycle)</b>	60 Hz
<b>Motor Phase</b>	1
<b>Motor Enclosure</b>	Open Air-Over
<b>RPM</b>	1,550 rpm, 1,300 rpm, 1,050 rpm
<b>Full Load Amps</b>	2.0/1.6/1.3

### Air & Sound Performance

Motor HP	Max BHP	Fan RPM	CFM @	0.000" SP	0.125" SP	0.250" SP	0.375" SP	0.500" SP	0.625" SP
1/20	0.02	1050	CFM	398	307	179	—	—	—
			Sones	4.0	3.9	4.3	—	—	—
1/20	0.04	1300	CFM	493	420	340	233	—	—
			Sones	5.5	5.3	5.3	5.5	—	—
1/20	0.06	1550	CFM	588	528	464	394	308	168
			Sones	7.6	7.4	7.4	7.4	7.6	8.1

Performance certified for installation type A: Free inlet, Free outlet. Performance ratings include the effects of a birdscreen in the airstream. The sound ratings shown are loudness values in fan sones at 5 ft. (1.5 m) in a hemispherical free field calculated per AMCA Standard 301. Values shown are for installation type A: Free inlet fan sone levels.