

**Wall Mount Cabinet Exhaust Fan**



Designed for commercial and industrial applications requiring assembled packaged units able to deliver high volumes of air at low static pressures. Fans are completely assembled and ready for installation. Construction includes galvanized steel fan panel, fabricated propeller and bolted cabinets. Fan includes wall mounting angles for easy installation.


- Air handling quality bearings meet minimum of L10-100,000 hours
- Maximum inlet air temperature: 104° F
- Variable pitch adjustable motor pulley to optimize fan performance
- Exhaust damper blade is top-pivoting gravity return

AMCA Sound & Air Dayton Electric Mfg. Co. certifies that the ventilators shown herein are licensed to carry the AMCA seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirements of the AMCA Certified Ratings Program.

UL/cUL 705




CSA Certified Motor

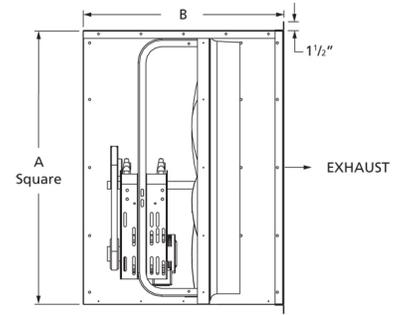

A	B
28 1/4 in	34 1/8 in

**Performance Characteristics**

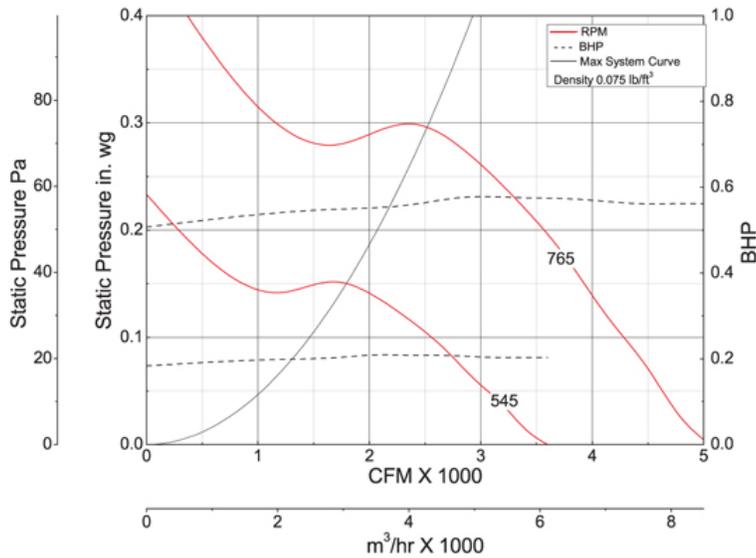

**Construction Features**

Impeller Diameter (Typ.)	24 in
Impeller Type	Propeller
Impeller Material	Fabricated Steel
Max Inlet Temp	104 °F
Bearing Type	Regreaseable Cast Pillow Block
Drive Package Description	Drives Assembled
Warranty Length	1 Year

**Motor Information**

Motor Item Number	50M238
Voltage	115/208-230
Hertz (Cycle)	60 Hz
Motor Phase	1
Motor Enclosure	Totally Enclosed Air-Over
RPM	1,725 rpm
Full Load Amps	8.0/4.0-4.0

**Other Components**

Component	Description	Item #
Fan Description	Exhaust Fan	—
Driver Sheave	1VL40x5/8	3X264
Driven Sheave	BK90H	3X599
Driven Bushing	H x 3/4	3X573

**Air & Sound Performance**

Motor HP	Max BHP	Fan RPM	CFM @	0.000" SP	0.125" SP	0.250" SP
1/2	0.58	765	CFM	5056	4097	3100
			Sones	16.1	12.9	12.5

Performance certified is for installation type A: Free inlet, Free outlet. Power rating (BHP) does not include transmission losses. Performance ratings include the effects of a birdscreen and damper in the air stream. Speed (RPM) shown is nominal. Performance is based on actual speed of test. The sound ratings shown are loudness values in fan sones at 5 ft. (1.5 m) in a hemispherical free field calculated per AMCA Standard 301. Values are for installation type A: Free inlet hemispherical sone levels.

Catalog 405, January 2010

**Operating Range of Drive Package**

Turns Open	FRPM @ 0 TO	FRPM @ 1/2 TO	FRPM @ 1 TO	FRPM @ 1 1/2 TO	FRPM @ 2 TO	FRPM @ 2 1/2 TO	FRPM @ 3 TO	FRPM @ 3 1/2 TO	FRPM @ 4 TO	FRPM @ 4 1/2 TO	FRPM @ 5 TO
Approx. FRPM	765	731	711	690	669	648	628	607	586	566	545