

## Assembled Centrifugal Belt-Drive Upblast Exhaust Ventilator



Designed for use in restaurants, schools, commercial, and industrial applications to exhaust contaminated air from kitchen range hoods, up and away from the roof. Leakproof, spun aluminum construction features a fully rolled windband for increased stability.

- Aluminum backward inclined, nonoverloading centrifugal wheel design
- Maximum inlet air temperature: 300° F
- NEMA 1 junction box located in motor enclosure
- Optional NEMA 1 and 4 disconnects available
- Sealed pillow block bearings
- UL/cUL 705 Listed for Power Ventilators
- UL/cUL 762 Listed for Restaurant Exhaust Appliances
- Air handling quality bearings meet minimum of L10-100,000 hours


AMCA Sound & Air Dayton Electric Mfg. Co. certifies that the ventilators shown herein are licensed to use the AMCA seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirements of the AMCA Certified Ratings Program.

UL/cUL 762




E53236  
MH12596

CSA Certified Motor

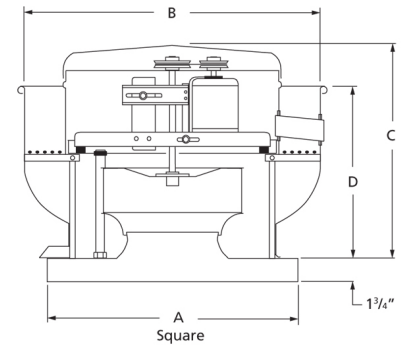

A	B	C	D
22 in	24 7/8 in	25 1/8 in	17 3/8 in

### Performance Characteristics

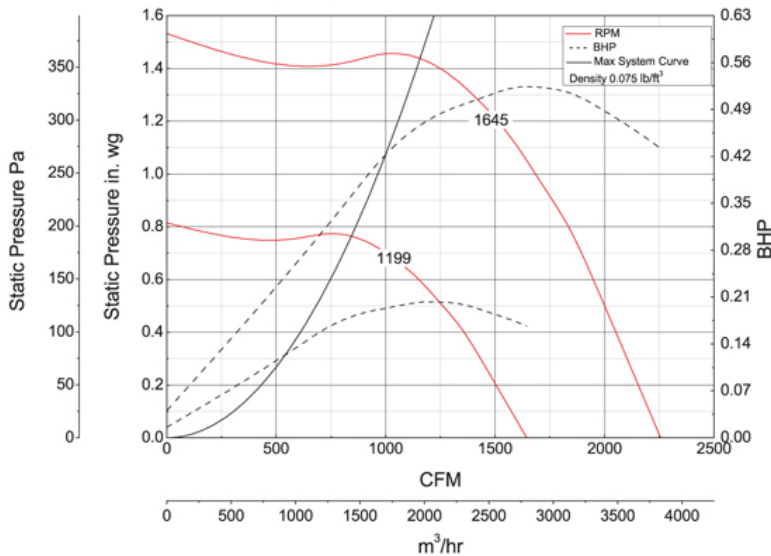

### Construction Features

<b>Impeller Diameter (Typ.)</b>	13 1/4 in
<b>Impeller Type</b>	Backward Inclined Centrifugal
<b>Impeller Material</b>	Aluminum
<b>Max Inlet Temp</b>	300 °F
<b>Bearing Type</b>	Sealed Pillow Block
<b>Drive Package Description</b>	Drives Assembled
<b>Warranty Length</b>	1 Year

### Motor Information

<b>Motor Item Number</b>	1AGG3
<b>Voltage</b>	115/208-230
<b>Hertz (Cycle)</b>	60 Hz
<b>Motor Phase</b>	1
<b>Motor Enclosure</b>	Open Drip Proof
<b>RPM</b>	1,725 rpm
<b>Full Load Amps</b>	7.2/3.6-3.6

### Other Components

Component	Description	Item #
Fan Description	Exhaust Fan	—
Belt	4L23 (QTY: 1)	4L230
Driver Sheave	1VP40x5/8	3X264
Driven Sheave	AK41x3/4	5RJC2

### Air & Sound Performance

Motor HP	Max BHP	Fan RPM	CFM @	0.000" SP	0.125" SP	0.250" SP	0.375" SP	0.500" SP	0.625" SP	0.750" SP	0.875" SP	1.000" SP	1.250" SP
1/2	0.52	1645	CFM	2256	2192	2128	2065	2001	1933	1864	1778	1684	1455
			Sones	17.9	17.6	17.4	17.2	16.9	16.5	16.1	15.6	15.1	13.9

Performance certified is for installation type A: Free inlet, Free outlet. Power rating (BHP) does not include transmission losses. Performance ratings do not include the effects of appurtenances (accessories). The sound ratings shown are loudness values in fan sones at 5 ft. (1.5 m) in a hemispherical free field calculated per AMCA Standard 301. Values shown are for installation type A: Free inlet hemispherical sone levels.

Catalog 405, January 2010

### Operating Range of Drive Package

Turns Open	FRPM @ 0 TO	FRPM @ 1/2 TO	FRPM @ 1 TO	FRPM @ 1 1/2 TO	FRPM @ 2 TO	FRPM @ 2 1/2 TO	FRPM @ 3 TO	FRPM @ 3 1/2 TO	FRPM @ 4 TO	FRPM @ 4 1/2 TO	FRPM @ 5 TO
Approx. FRPM	1645	1609	1564	1518	1473	1427	1391	1336	1290	1245	1199