



Stock No.
1MBE9

Job Name:
Mark:

Submitted By:
Date:9/17/2025

Power Roof Ventilators

Assembled Centrifugal Belt-Drive Upblast Exhaust Ventilator




Designed for use in restaurants, schools, commercial, and industrial applications to exhaust contaminated air from kitchen range hoods, up and away from the roof. Leakproof, spun aluminum construction features a fully rolled windband for increased stability.

- Aluminum backward inclined, nonoverloading centrifugal wheel design
- Maximum inlet air temperature: 300° F
- NEMA 1 junction box located in motor enclosure
- Optional NEMA 1 and 4 disconnects available
- Sealed pillow block bearings
- UL/cUL 705 Listed for Power Ventilators
- UL/cUL 762 Listed for Restaurant Exhaust Appliances
- Air handling quality bearings meet minimum of L10-100,000 hours

AMCA Sound & Air
Dayton Electric Mfg. Co. certifies that the ventilators shown herein are licensed to use the AMCA seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirements of the AMCA Certified Ratings Program.


UL/cUL 762
UL US LISTED
E53236
MH12596

CSA Certified Motor

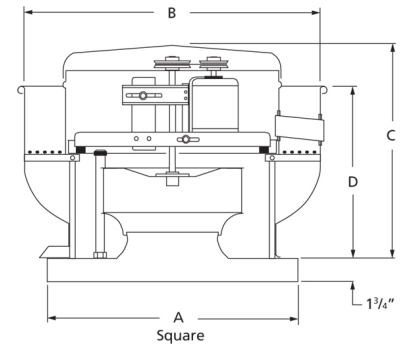

A	B	C	D
26 in	28 7/8 in	26 3/8 in	19 3/8 in

Performance Characteristics

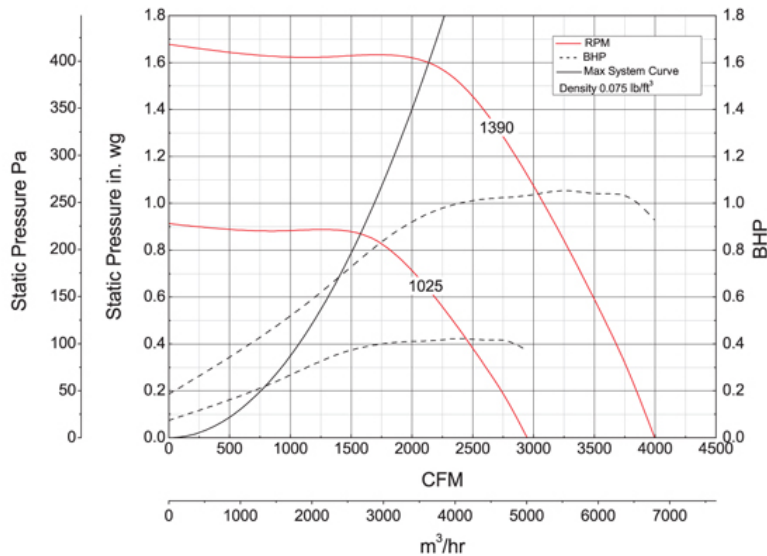

Construction Features

Impeller Diameter (Typ.)	16 1/2 in
Impeller Type	Backward Inclined Centrifugal
Impeller Material	Aluminum
Max Inlet Temp	300 °F
Bearing Type	Sealed Pillow Block
Drive Package Description	Drives Assembled
Warranty Length	1 Year

Motor Information

Motor Item Number	4YU30
Voltage	115/208-230
Hertz (Cycle)	60 Hz
Motor Phase	1
Motor Enclosure	Open Drip Proof
RPM	1,725 rpm
Full Load Amps	12.8/6.4-6.4

Other Components

Component	Description	Item #
Fan Description	Exhaust Fan	—
Belt	AX22 (QTY: 1)	3VU41
Driver Sheave	1VP40x5/8	3X264
Driven Sheave	BK55H	3X587
Driven Bushing	H x 3/4	3X573

Air & Sound Performance

Motor HP	Max BHP	Fan RPM	CFM @	0.000" SP	0.125" SP	0.250" SP	0.375" SP	0.500" SP	0.625" SP	0.750" SP	0.875" SP	1.000" SP	1.250" SP	1.500" SP
1	1.05	1390	CFM	3996	3901	3806	3698	3584	3464	3340	3213	3078	2785	2394
			Sones	22.0	21.0	21.0	20.0	19.9	19.6	19.4	19.2	19.0	18.6	18.0

Performance certified is for installation type A: Free inlet, Free outlet. Power rating (BHP) does not include transmission losses. Performance ratings do not include the effects of appurtenances (accessories). The sound ratings shown are loudness values in fan sones at 5 ft. (1.5 m) in a hemispherical free field calculated per AMCA Standard 301. Values shown are for installation type A: Free inlet hemispherical sone levels.

Catalog 405, January 2010

Operating Range of Drive Package

Turns Open	FRPM @ 0 TO	FRPM @ 1/2 TO	FRPM @ 1 TO	FRPM @ 1 1/2 TO	FRPM @ 2 TO	FRPM @ 2 1/2 TO	FRPM @ 3 TO	FRPM @ 3 1/2 TO	FRPM @ 4 TO	FRPM @ 4 1/2 TO	FRPM @ 5 TO
Approx. FRPM	1361	1324	1286	1249	1212	1175	1137	1100	1063	1025	—