

Stock No. Job Name: 1UBH8 Mark: Submitted By: Date:6/17/2025

Fans

Silent Low-Profile Ceiling Fan

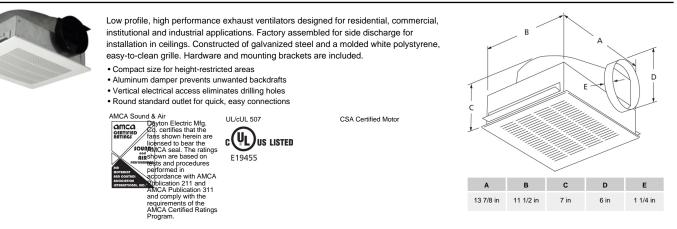

Performance Characteristics

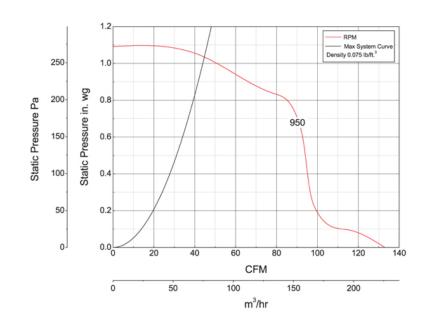

Construction Features

Impeller Type	Forward Curved Centrifugal
Impeller Material	Polypropylene
Max Inlet Temp	104 °F
Warranty Length	1 Year

Motor Information

Motor Item Number	21DX71
Voltage	115
Hertz (Cycle)	60 Hz
Motor Phase	1
Motor Enclosure	Open Drip Proof
RPM	950 rpm
Full Load Amps	1.14

Air & Sound Performance

Motor HP	Max BHP	Fan RPM	CFM @	0.000" SP	0.125" SP	0.250" SP	0.375" SP	0.500" SP	0.625" SP	0.750" SP	0.875" SP	1.000" SP
	_	950	CFM	133	110	97	95	94	91	85	72	50
			Sones	1.5	1.6	1.7	2.0	2.0	2.9	3.5	3.8	4.4

Performance certified is for installation type B: Free inlet, Ducted outlet. Performance ratings include the effects of an inlet grille and backdraft damper. Speed (RPM) shown is nominal. Performance is based on actual speed of test. The sound ratings shown are loudness values in fan sones at 5 ft. (1.5 m) in a spherical free field calculated per AMCA Standard 301. Values shown are for installation type B: Free inlet spherical sone levels.

Catalog 405, January 2010