Job Name: Mark: Submitted By: Date:10/30/2025

## Standard-Duty Belt-Drive Supply Fan



Designed for commercial and industrial applications requiring high volumes of air at low static pressures. Construction includes rigid drive frame rails and one-piece motor/bearing plate. Mount fan in vertical position for supply applications or horizontal position for exhaust applications.

- Variable pitch adjustable motor pulley to optimize fan performance
- Maximum inlet air temperature: 104° F
- 6-Blade reinforced galvanized steel propellers

AMCA Sound & Ai

AMCA
CERTIFIED
RATINGS

SOUND
and
RATINGS


FROM
RATINGS

FROM
RATINGS


FROM
RATINGS

ir Dayton Electric Mfg. Co. certifies that the ventilators shown herein are licensed to bear the AMCA seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirements of the AMCA Certified Ratings Program.





## **Performance Characteristics**

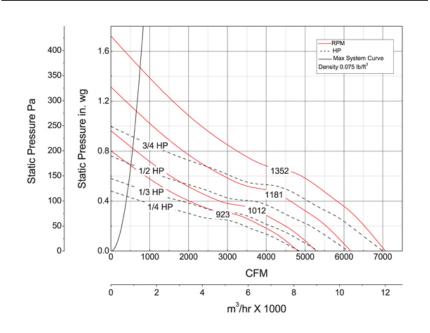

## **Construction Features**

Impeller Diameter (Typ.)	24 in	
Impeller Type	Propeller	
Impeller Material	Galvanized Steel	
Number of Blades	6	
Max Inlet Temp	104 °F	
Bearing Type	Sealed Pillow Block	
Drive Package Description	Drives By Others	
Warranty Length	1 Year	

## **Air & Sound Performance**

Motor HP	Max BHP	Fan RPM	CFM @	0.000" SP	0.125" SP	0.250" SP	0.375" SP
1/4 0.30	0.30	923	CFM	4826	4312	3570	_
	020	Sones	17.3	17.1	16.8	_	
1/3 0.39	0.39	0.39 1012	CFM	5292	4830	4207	_
	0.00		Sones	21.0	20.0	19.9	_
1/2 0.60	0.60	.60 1181	CFM	6175	5789	5337	_
	1101	Sones	24.0	26.0	25.0	_	
3/4 0.90	0.90	1352	CFM	7069	6732	6372	5917
	0.00	1002	Sones	30.0	30.0	29.0	29.0

Performance certified is for installation type A: Free inlet, Free outlet. Power rating (BHP) does not include transmission losses. Performance ratings do not include the effects of appurtenances (accessories). The sound ratings shown are loudness values in fan sones at 5 ft. (1.5 m) in a hemispherical free field calculated per AMCA Standard 301. Values shown are for installation type A: Free inlet hemispherical fan sone levels.

Catalog 405, January 2010