Dayton

Stock No.
20UD19

Job Name:
Mark:

Submitted By:
Date:11/29/2026

Blowers

Utility Exhaust Direct-Drive Blower



Designed for industrial spark resistant applications requiring high volumes of air at high static pressures. Constructed out of heavy gauge steel with polyester gray coating. Scroll is clockwise rotation and can be rotated in 45º increments to 8 positions (shipped in upblast position). Includes weatherhood and a bolted access door located on the scroll. Features electronically commutated (EC) motor, providing up to 60% energy savings. Potentiometer dial on motor allows speed control down to 80%. Optional speed control kit No. 43Y140 allows the user to manually adjust a fan's speed from a remote location and mounts to a wall using a 2x4 junction box. For internal or external mounting.

- Maximum inlet air temperature: 180º F
- UL/cUL 705 Listed for Power Ventilators
- Polyester gray coating
- Backward incline nonoverloading aluminum wheel
- Aluminum rub ring
- Bolted access door

GREEN Product
- Variable Speed capable of 80% turn down at a minimum of 85% efficiency at all speeds
- Reduce Energy Consumption


AMCA Air

Dayton Electric Mfg. Co. certifies that the blowers shown herein are licensed to bear the AMCA seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and comply with the requirements of the AMCA Certified Ratings Program.

UL/cUL 705

E53236

CSA Certified Motor

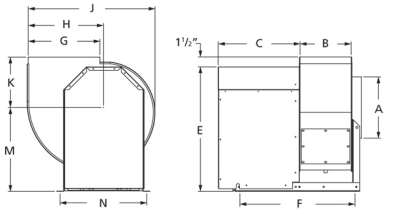

A	B	C	E	F	G
11 in	9 3/4 in	12 1/8 in	22 1/4 in	21 3/4 in	11 1/4 in

H	J	K	M	N
11 1/2 in	20 1/8 in	8 5/8 in	15 1/8 in	16 in

Performance Characteristics

No Fan Curve Available.

Construction Features

Impeller Diameter (Typ.)	11 1/8 in
Impeller Type	Backward Inclined Centrifugal
Impeller Material	Aluminum
Max Inlet Temp	180 °F
Warranty Length	1 Year

Motor Information

Motor Item Number	32RU48
Voltage	115
Hertz (Cycle)	60 Hz
Motor Phase	1
Motor Enclosure	Open
RPM	rpm
Full Load Amps	10.6

Air & Sound Performance

Motor HP	Max BHP	Fan RPM	CFM @	0.250" SP	0.500" SP	0.750" SP	1.000" SP	1.500" SP	2.000" SP
3/4	—	1100	CFM	711	509	—	—	—	—
			Sones	—	—	—	—	—	—
3/4	—	1650	CFM	1217	1097	968	834	—	—
			Sones	—	—	11.8	—	—	—
3/4	—	2200	CFM	1691	1602	1512	1422	1226	1018
			Sones	—	—	18.9	—	—	—

Performance certified is for installation type B: Free inlet, Ducted outlet. Power rating (BHP) does not include transmission losses. Performance ratings do not include the effects of appurtenances (accessories). The AMCA Certified ratings Seal applies to air performance ratings only.