



Stock No.  
**2RB66**

Job Name:  
Mark:

Submitted By:  
Date:9/16/2025

**Power Roof Ventilators**

## High Pressure Centrifugal Belt-Drive Upblast Exhaust Ventilator



Designed for use in restaurants, schools, commercial, and industrial applications to exhaust contaminated air from kitchen range hoods, up and away from the roof. Leakproof, spun aluminum construction features a fully rolled windband for increased stability.

- Aluminum backward inclined, nonoverloading centrifugal wheel design
- Maximum inlet air temperature: 300° F
- NEMA 1 junction box located in motor enclosure
- Optional NEMA 1 and 4 disconnects available
- Sealed pillow block bearings
- UL/cUL 705 Listed for Power Ventilators
- UL/cUL 762 Listed for Restaurant Exhaust Appliances
- Air handling quality bearings meet minimum of L10-100,000 hours




Dayton Electric Mfg. Co. certifies that the ventilators shown herein are licensed to bear the AMCA seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirements of the AMCA Certified Ratings Program.

UL/cUL 762




E53236  
MH12596

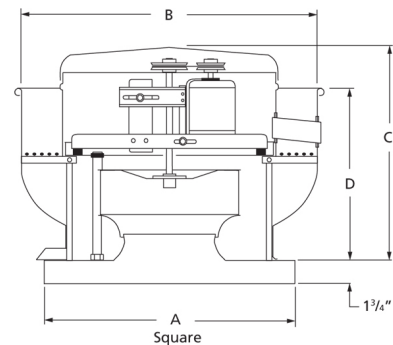

A	B	C	D
26 in	28 7/8 in	26 3/8 in	19 3/8 in

## Performance Characteristics

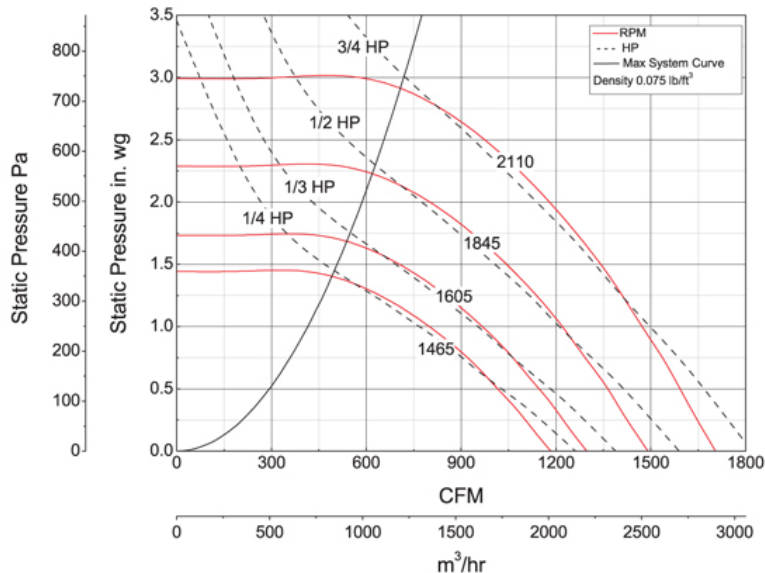

## Construction Features

Impeller Diameter (Typ.)	14 3/4 in
Impeller Type	Backward Inclined Centrifugal
Impeller Material	Aluminum
Max Inlet Temp	300 °F
Bearing Type	Sealed Pillow Block
Drive Package Description	Drives By Others
Warranty Length	1 Year

## Air & Sound Performance

Motor HP	Max BHP	Fan RPM	CFM @	0.500" SP	0.625" SP	0.750" SP	0.875" SP	1.000" SP	1.250" SP	1.500" SP	1.750" SP	2.000" SP	2.250" SP	2.500" SP	2.750" SP
1/4	0.26	1465	CFM	1016	970	920	861	798	642	—	—	—	—	—	—
			Sones	14.2	13.7	13.5	13.4	13.2	15.5	—	—	—	—	—	—
1/3	0.34	1605	CFM	1146	1105	1063	1018	965	846	704	—	—	—	—	—
			Sones	15.2	14.7	14.4	14.3	14.2	14.0	15.2	—	—	—	—	—
1/2	0.52	1845	CFM	1363	1328	1292	1255	1219	1137	1042	924	800	—	—	—
			Sones	17.0	16.8	16.6	16.4	16.2	16.0	15.9	15.6	16.1	—	—	—
3/4	0.78	2110	CFM	1592	1565	1536	1504	1473	1409	1341	1262	1178	1073	965	804
			Sones	19.8	19.6	19.3	19.2	19.1	19.0	18.9	18.8	18.6	18.5	18.3	20.0

Performance certified is for installation type A: Free inlet, Free outlet. Power rating (BHP) does not include transmission losses. Performance ratings do not include the effects of appurtenances (accessories). The sound ratings shown are loudness values in fan sones at 5 ft. (1.5 m) in a hemispherical free field calculated per AMCA Standard 301. Values shown are for installation type A: Free inlet hemispherical sone levels.