


**Assembled Centrifugal Belt-Drive Upblast Exhaust Ventilator**

Designed for use in restaurants, schools, commercial, and industrial applications to exhaust contaminated air from kitchen range hoods, up and away from the roof. Leakproof, spun aluminum construction features a fully rolled windband for increased stability.


- Aluminum backward inclined, nonoverloading centrifugal wheel design
- Maximum inlet air temperature: 300° F
- NEMA 1 junction box located in motor enclosure
- Optional NEMA 1 and 4 disconnects available
- Regreaseable pillow block bearings
- UL/cUL 705 Listed for Power Ventilators
- UL/cUL 762 Listed for Restaurant Exhaust Appliances
- Air handling quality bearings meet minimum of L10-100,000 hours



CSA Certified Motor



A	B	C	D
42 in	50 in	40 in	29 1/4 in

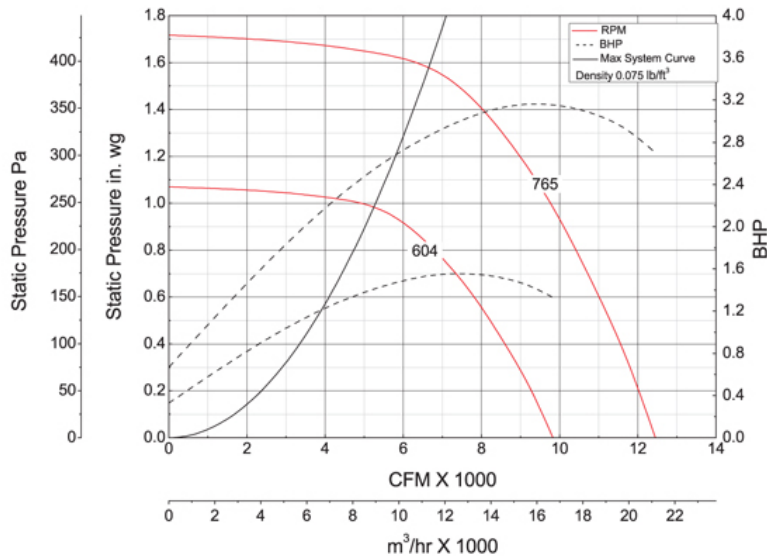**Performance Characteristics****Construction Features**

Impeller Diameter (Typ.)	30 1/2 in
Impeller Type	Backward Inclined Centrifugal
Impeller Material	Aluminum
Max Inlet Temp	300 °F
Bearing Type	Regreaseable Pillow Block
Drive Package Description	Drives Assembled
Warranty Length	1 Year

**Motor Information**

Motor Item Number	6XWJ0
Voltage	208-230/460
Hertz (Cycle)	60 Hz
Motor Phase	3
Motor Enclosure	Open Drip Proof
RPM	rpm
Full Load Amps	

**Other Components**

Component	Description	Item #
Fan Description	Exhaust Fan	—
Belt	A46 (QTY: 1)	3X471
Driver Sheave	1VP50x1 1/8	5UHT4
Driven Sheave	BK115QT	5RJG3
Driven Bushing	QTx1	5UHZ2

**Air & Sound Performance**

Motor HP	Max BHP	Fan RPM	CFM @	0.000" SP	0.125" SP	0.250" SP	0.375" SP	0.500" SP	0.625" SP	0.750" SP	0.875" SP	1.000" SP	1.250" SP	1.500" SP
3	3.15	765	CFM	12,449	12,176	11,904	11,607	11,273	10,939	10,554	10,169	9743	8756	7352
			Sones	24.0	24.0	23.0	22.0	22.0	21.0	21.0	20.0	20.0	18.7	17.0

Performance certified is for installation type A: Free inlet, Free outlet. Power rating (BHP) does not include transmission losses. Performance ratings do not include the effects of appurtenances (accessories). The sound ratings shown are loudness values in fan sones at 5 ft. (1.5 m) in a hemispherical free field calculated per AMCA Standard 301. Values shown are for installation type A: Free inlet hemispherical sone levels.

Catalog 405, January 2010

**Operating Range of Drive Package**

Turns Open	FRPM @ 0 TO	FRPM @ 1/2 TO	FRPM @ 1 TO	FRPM @ 1 1/2 TO	FRPM @ 2 TO	FRPM @ 2 1/2 TO	FRPM @ 3 TO	FRPM @ 3 1/2 TO	FRPM @ 4 TO	FRPM @ 4 1/2 TO	FRPM @ 5 TO
Approx. FRPM	765	736	719	703	686	670	653	637	621	604	—