

Assembled Centrifugal Belt-Drive Downblast Exhaust Ventilator



Designed to meet the general clean air exhaust requirements for industrial and commercial buildings. Features a fully rolled windband bead for increased stability and easy transport. Fresh outside air is drawn in under the motor cover to maximize motor life.


- Aluminum backward inclined, nonoverloading centrifugal wheel design
- Maximum inlet air temperature: 180° F
- NEMA 1 junction box located in motor enclosure
- Optional NEMA 1 and 4 disconnects available
- Sealed pillow block bearings
- UL/cUL 705 Listed for Power Ventilators
- Air handling quality bearings meet minimum of L10-100,000 hours

AMCA Sound & Air Dayton Electric Mfg. Co. certifies that the ventilators shown herein are licensed to bear the AMCA seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirements of the AMCA Certified Ratings Program.

UL/cUL 705




CSA Certified Motor

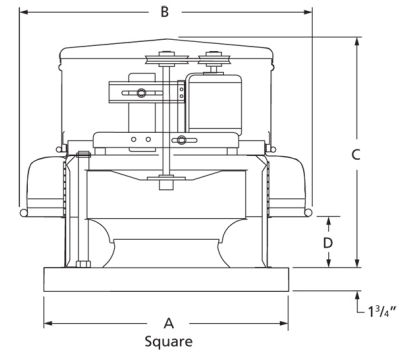

| A | B | C | D |
|-------|-----------|-----------|------|
| 26 in | 28 3/8 in | 25 3/8 in | 4 in |

Performance Characteristics

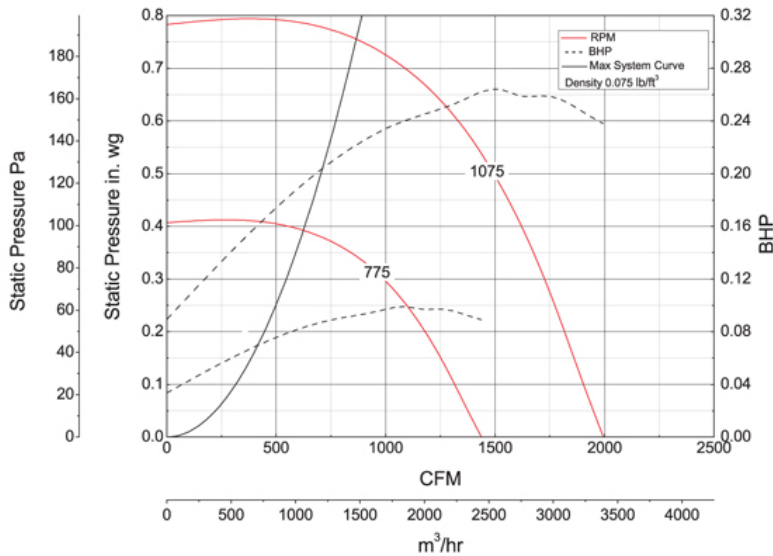

Construction Features

| | |
|---------------------------|-------------------------------|
| Impeller Diameter (Typ.) | 14 3/4 in |
| Impeller Type | Backward Inclined Centrifugal |
| Impeller Material | Aluminum |
| Max Inlet Temp | 180 °F |
| Bearing Type | Sealed Pillow Block |
| Drive Package Description | Drives Assembled |
| Warranty Length | 1 Year |

Motor Information

| | |
|-------------------|-----------------|
| Motor Item Number | 1AGG1 |
| Voltage | 115/208-230 |
| Hertz (Cycle) | 60 Hz |
| Motor Phase | 1 |
| Motor Enclosure | Open Drip Proof |
| RPM | 1,725 rpm |
| Full Load Amps | 6.2/2.8-3.1 |

Other Components

| Component | Description | Item # |
|-----------------|---------------|--------|
| Fan Description | Exhaust Fan | — |
| Belt | 4L28 (QTY: 1) | 4L280 |
| Driver Sheave | 1VP40x1/2 | 5UHR3 |
| Driven Sheave | BK67H | 3X592 |
| Driven Bushing | H x 3/4 | 3X573 |

Air & Sound Performance

| Motor HP | Max BHP | Fan RPM | CFM @ | 0.000" SP | 0.125" SP | 0.250" SP | 0.375" SP | 0.500" SP | 0.625" SP |
|----------|---------|---------|-------|-----------|-----------|-----------|-----------|-----------|-----------|
| | | | Sones | 1994 | 1882 | 1771 | 1647 | 1490 | 1266 |
| 1/4 | 0.26 | 1075 | 10.0 | 9.9 | 9.4 | 8.9 | 8.4 | 7.8 | |

Performance certified is for installation type A: Free inlet, Free outlet. Power rating (BHP) does not include transmission losses. Performance ratings include the effects of a birdscreen in the airstream. The sound ratings shown are loudness values in fan sones at 5 ft. (1.5 m) in a hemispherical free field calculated per AMCA Standard 301. Values shown are for installation type A: Free inlet hemispherical sone levels.

Catalog 405, January 2010

Operating Range of Drive Package

| Turns Open | FRPM @ 0 TO | FRPM @ 1/2 TO | FRPM @ 1 TO | FRPM @ 1 1/2 TO | FRPM @ 2 TO | FRPM @ 2 1/2 TO | FRPM @ 3 TO | FRPM @ 3 1/2 TO | FRPM @ 4 TO | FRPM @ 4 1/2 TO | FRPM @ 5 TO |
|--------------|-------------|---------------|-------------|-----------------|-------------|-----------------|-------------|-----------------|-------------|-----------------|-------------|
| Approx. FRPM | 1075 | 1056 | 1027 | 997 | 968 | 939 | 910 | 880 | 851 | 822 | — |