



Stock No.
48C184

Job Name:
Mark:

Submitted By:
Date:9/16/2025

Power Roof Ventilators

Variable Speed Electronically Commutated (EC) Ventilator




Designed for use in schools, commercial, and industrial applications to exhaust clean air, up and away from the building. Leakproof, spun aluminum construction features a fully rolled windband for increased stability. Energy Saving units feature EC motors which allow up to 80% usable turndown. Motor features potentiometer dial for speed adjustment. Optional Variable-Speed Control Kit (43Y140) can be used to remotely control speed.

- Aluminum backward inclined, nonoverloading centrifugal wheel design
- NEMA 1 junction box located in motor enclosure
- Optional NEMA 1 and 4 disconnects available
- Maximum inlet air temperature: 130° F
- High-efficiency brushless DC motor
- UL/cUL 705 Listed for Power Ventilators



GREEN Product

- Variable Speed capable of 80% turn down at a minimum of 85% efficiency at all speeds
- Reduce Energy Consumption




Dayton Electric Mfg. Co. certifies that the ventilators shown herein are licensed to bear the AMCA seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirements of the AMCA Certified Ratings Program.

UL/cUL 705




E53236

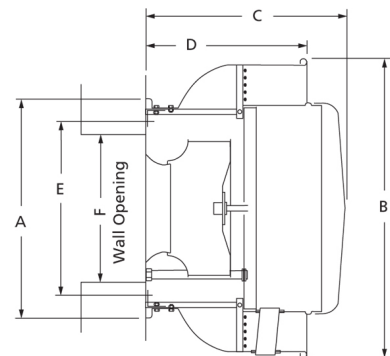

A	B	C	D	E	F
17 7/8 in	21 in	13 3/8 in	11 1/2 in	15 in	10 1/2 in

Performance Characteristics

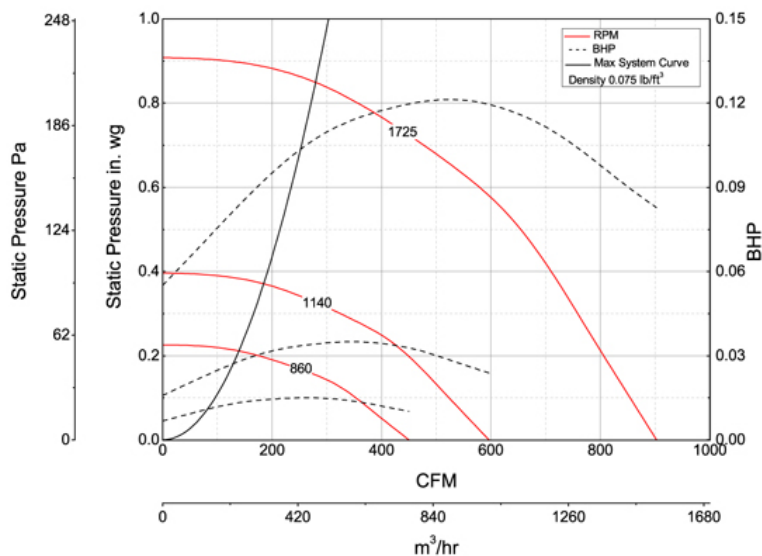

Construction Features

Impeller Diameter (Typ.)	11 in
Impeller Type	Backward Inclined Centrifugal
Impeller Material	Aluminum
Max Inlet Temp	130 °F
Warranty Length	1 Year

Motor Information

Motor Item Number	43Y135
Voltage	115
Hertz (Cycle)	60 Hz
Motor Phase	1
Motor Enclosure	Totally Enclosed
RPM	rpm
Full Load Amps	3.1

Air & Sound Performance

Motor HP	Max BHP	Fan RPM	CFM @	0.000" SP	0.125" SP	0.250" SP	0.375" SP	0.500" SP	0.625" SP	0.750" SP
1/6	0.02	860	CFM	450	324	—	—	—	—	—
			Sones	2.1	2.1	—	—	—	—	—
1/6	0.04	1140	CFM	596	505	395	—	—	—	—
			Sones	4.5	4.6	4.6	—	—	—	—
1/6	0.12	1725	CFM	903	842	782	722	652	553	420
			Sones	9.7	9.5	9.4	9.3	9.1	9.1	11.2

Performance certified is for installation type A: Free inlet, Free outlet. Performance ratings do not include the effects of appurtenances (accessories). The sound ratings shown are loudness values in fan sones at 5 ft. (1.5 m) in a hemispherical free field calculated per AMCA Standard 301. Values shown are for installation type A: Free inlet hemispherical sone levels.