



Job Name: Mark: Submitted By: Date:5/1/2025

## **Power Roof Ventilators**

### Centrifugal Direct-Drive Upblast Exhaust Ventilator

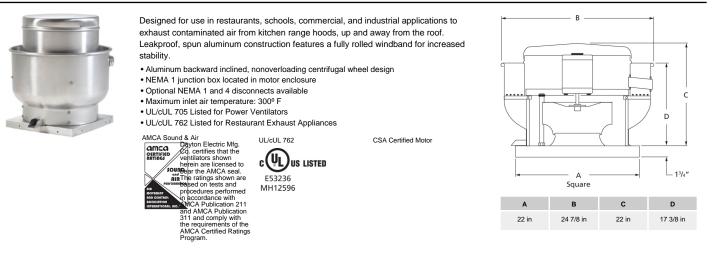

## **Performance Characteristics**

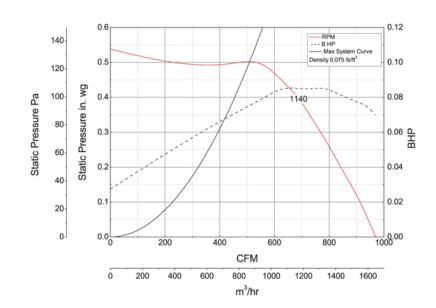

# **Construction Features**

Impeller Diameter (Typ.)	11 in			
Impeller Type	Backward Inclined Centrifugal			
Impeller Material	Aluminum			
Max Inlet Temp	300 °F			
Warranty Length	1 Year			

### **Motor Information**

Motor Item Number	4YU23
Voltage	115
Hertz (Cycle)	60 Hz
Motor Phase	1
Motor Enclosure	Open Air-Over
RPM	1,140 rpm
Full Load Amps	2.2

#### **Air & Sound Performance**

Motor HP	Max BHP	Fan RPM	CFM @	0.000" SP	0.125" SP	0.250" SP	0.375" SP
1/6 0.09	1140	CFM	970	897	806	707	
	1140	Sones	7.2	7.0	6.5	6.0	

Performance certified is for installation type A: Free inlet, Free outlet. Performance ratings do not include the effects of appurtenances (accessories). The sound ratings shown are loudness values in fan sones at 5 ft. (1.5 m) in a hemispherical free field calculated per AMCA Standard 301. Values shown are for installation type A: Free inlet hemispherical sone levels.

Catalog 405, January 2010