



Stock No.  
**4HZ55**

Job Name:  
Mark:

Submitted By:  
Date:9/17/2025

**Power Roof Ventilators**

## Centrifugal Direct-Drive Upblast Wall-Mount Exhaust Ventilator



Designed for use in restaurants, schools, commercial, and industrial applications to exhaust contaminated air from kitchen range hoods, up and away from the building. Leakproof, spun aluminum construction features a fully rolled windband for increased stability.


- Aluminum backward inclined, nonoverloading centrifugal wheel design
- NEMA 1 junction box located in motor enclosure
- Optional NEMA 1 and 4 disconnects available
- Maximum inlet air temperature: 300° F
- UL/cUL 705 Listed for Power Ventilators
- UL/cUL 762 Listed for Restaurant Exhaust Appliances

AMCA Sound & Air  
Dayton Electric Mfg. Co. certifies that the ventilators shown herein are licensed to bear the AMCA seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirements of the AMCA Certified Ratings Program.

UL/cUL 762




CSA Certified Motor

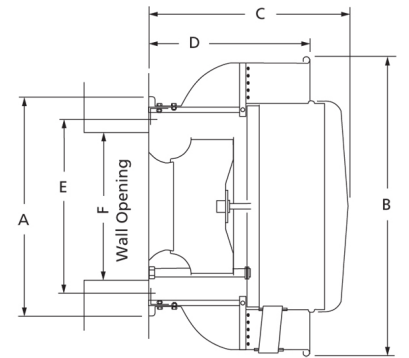

A	B	C	D	E	F
22 1/8 in	28 7/8 in	24 3/4 in	19 3/8 in	19 3/8 in	15 1/2 in

## Performance Characteristics

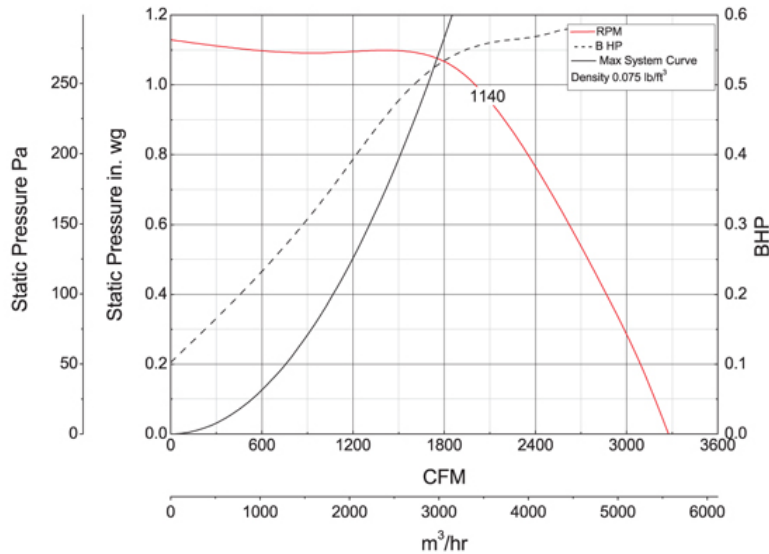

## Construction Features

Impeller Diameter (Typ.)	16 1/2 in
Impeller Type	Backward Inclined Centrifugal
Impeller Material	Aluminum
Max Inlet Temp	300 °F
Warranty Length	1 Year

## Motor Information

Motor Item Number	4YY55
Voltage	115/230
Hertz (Cycle)	60 Hz
Motor Phase	1
Motor Enclosure	Open Air-Over
RPM	1,140 rpm
Full Load Amps	8.0/4.0

## Air & Sound Performance

Motor HP	Max BHP	Fan RPM	CFM @	0.000" SP	0.125" SP	0.250" SP	0.375" SP	0.500" SP	0.625" SP	0.750" SP	0.875" SP	1.000" SP
3/4	0.58	1140	CFM	3277	3161	3035	2896	2745	2587	2421	2232	1983
			Sones	15.7	15.2	14.8	14.3	14.1	13.8	13.5	13.3	13.2

Performance certified is for installation type A: Free inlet, Free outlet. Performance ratings do not include the effects of appurtenances (accessories). The sound ratings shown are loudness values in fan sones at 5 ft. (1.5 m) in a hemispherical free field calculated per AMCA Standard 301. Values shown are for installation type A: Free inlet hemispherical sone levels.