



Stock No.
4YY15

Job Name:
Mark:

Submitted By:
Date:9/17/2025

Power Roof Ventilators

Centrifugal Belt-Drive Upblast Exhaust Ventilator



Designed for use in restaurants, schools, commercial, and industrial applications to exhaust contaminated air from kitchen range hoods, up and away from the roof. Leakproof, spun aluminum construction features a fully rolled windband for increased stability.

- Aluminum backward inclined, nonoverloading centrifugal wheel design
- Maximum inlet air temperature: 300° F
- NEMA 1 junction box located in motor enclosure
- Optional NEMA 1 and 4 disconnects available
- Sealed pillow block bearings
- UL/cUL 705 Listed for Power Ventilators
- UL/cUL 762 Listed for Restaurant Exhaust Appliances
- Air handling quality bearings meet minimum of L10-100,000 hours




Dayton Electric Mfg. Co. certifies that the ventilators shown herein are licensed to bear the AMCA seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirements of the AMCA Certified Ratings Program.

UL/cUL 762
UL US LISTED
E53236
MH12596



A	B	C	D
22 in	24 7/8 in	25 1/8 in	17 3/8 in

Performance Characteristics

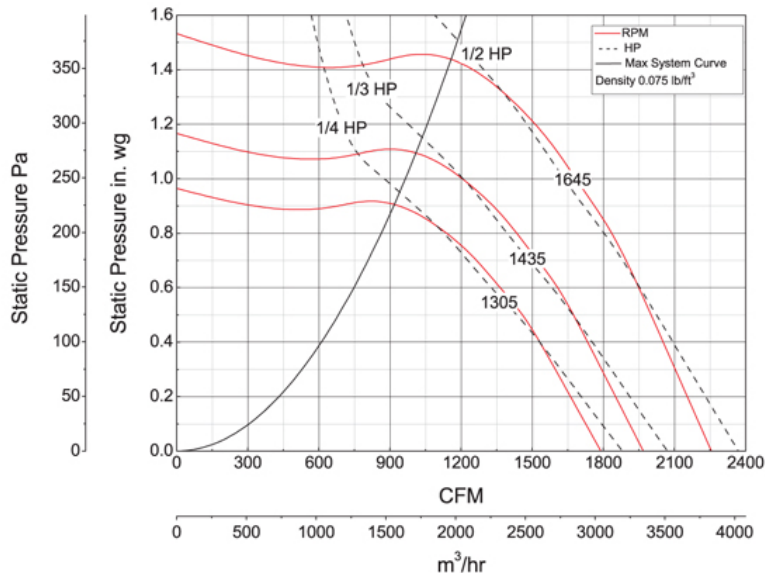

Construction Features

Impeller Diameter (Typ.)	13 1/4 in
Impeller Type	Backward Inclined Centrifugal
Impeller Material	Aluminum
Max Inlet Temp	300 °F
Bearing Type	Sealed Pillow Block
Drive Package Description	Drives By Others
Warranty Length	1 Year

Air & Sound Performance

Motor HP	Max BHP	Fan RPM	CFM @	0.000" SP	0.125" SP	0.250" SP	0.375" SP	0.500" SP	0.625" SP	0.750" SP	0.875" SP	1.000" SP	1.250" SP
1/4	0.26	1305	CFM	1790	1709	1629	1547	1458	1340	1201	1003	—	—
			Sones	14.6	14.3	13.9	13.5	13.0	12.0	11.5	10.8	—	—
1/3	0.35	1435	CFM	1968	1895	1822	1749	1671	1586	1479	1358	1198	—
			Sones	15.7	15.5	15.1	14.8	14.3	13.8	13.1	12.5	11.9	—
1/2	0.52	1645	CFM	2256	2192	2128	2065	2001	1933	1864	1778	1684	1455
			Sones	17.9	17.6	17.4	17.2	16.9	16.5	16.1	15.6	15.1	13.9

Performance certified is for installation type A: Free inlet, Free outlet. Power rating (BHP) does not include transmission losses. Performance ratings do not include the effects of appurtenances (accessories). The sound ratings shown are loudness values in fan sones at 5 ft. (1.5 m) in a hemispherical free field calculated per AMCA Standard 301. Values shown are for installation type A: Free inlet hemispherical sone levels.