

## Centrifugal Belt-Drive Upblast Exhaust Ventilator



Designed for use in restaurants, schools, commercial, and industrial applications to exhaust contaminated air from kitchen range hoods, up and away from the roof. Leakproof, spun aluminum construction features a fully rolled windband for increased stability.

- Aluminum backward inclined, nonoverloading centrifugal wheel design
- Maximum inlet air temperature: 300° F
- NEMA 1 junction box located in motor enclosure
- Optional NEMA 1 and 4 disconnects available
- Regreaseable pillow block bearings
- UL/cUL 705 Listed for Power Ventilators
- UL/cUL 762 Listed for Restaurant Exhaust Appliances
- Air handling quality bearings meet minimum of L10-100,000 hours




Dayton Electric Mfg. Co. certifies that the ventilators shown herein are licensed to bear the AMCA seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirements of the AMCA Certified Ratings Program.

UL/cUL 762




E53236  
MH12596

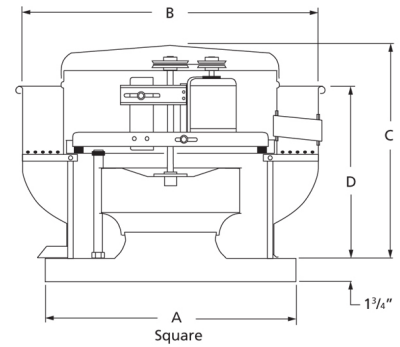

A	B	C	D
30 in	35 3/8 in	34 3/4 in	21 in

## Performance Characteristics

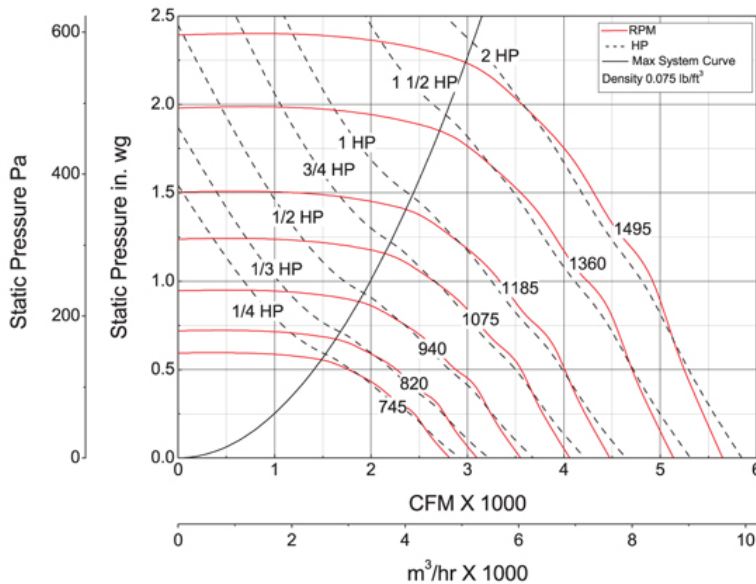

## Construction Features

<b>Impeller Diameter (Typ.)</b>	18 1/2 in
<b>Impeller Type</b>	Backward Inclined Centrifugal
<b>Impeller Material</b>	Aluminum
<b>Max Inlet Temp</b>	300 °F
<b>Bearing Type</b>	Regreaseable Pillow Block
<b>Drive Package Description</b>	Drives By Others
<b>Warranty Length</b>	1 Year

## Air & Sound Performance

Motor HP	Max BHP	Fan RPM	CFM @	0.000" SP	0.125" SP	0.250" SP	0.375" SP	0.500" SP	0.625" SP	0.750" SP	0.875" SP	1.000" SP	1.250" SP	1.500" SP	1.750" SP	2.000" SP	
1/4	0.26	745	CFM	2815	2617	2448	2143	1763	—	—	—	—	—	—	—	—	
			Sones	9.2	8.6	8.1	7.4	7.1	—	—	—	—	—	—	—	—	—
1/3	0.34	820	CFM	3098	2916	2759	2525	2257	1867	—	—	—	—	—	—	—	
			Sones	11.2	10.4	10.0	9.5	9.0	8.5	—	—	—	—	—	—	—	—
1/2	0.52	940	CFM	3551	3389	3243	3115	2879	2654	2363	1900	—	—	—	—	—	
			Sones	13.8	13.5	13.1	12.9	12.4	12.0	11.2	10.3	—	—	—	—	—	—
3/4	0.78	1075	CFM	4061	3919	3786	3666	3554	3345	3141	2926	2652	—	—	—	—	
			Sones	16.5	16.2	15.8	15.7	15.5	15.1	14.7	14.2	13.3	—	—	—	—	—
1	1.04	1185	CFM	4477	4348	4224	4108	4005	3904	3703	3515	3336	2841	—	—	—	
			Sones	18.5	17.9	17.1	16.8	16.5	16.3	16.0	15.6	15.2	14.4	—	—	—	—
1 1/2	1.58	1360	CFM	5138	5026	4913	4811	4710	4620	4532	4410	4232	3912	3537	3023	—	—
			Sones	23.0	23.0	22.0	22.0	21.0	21.0	21.0	21.0	20.0	20.0	19.2	18.3	17.3	—
2	2.10	1495	CFM	5648	5546	5443	5345	5254	5163	5082	5002	4921	4598	4313	3983	3564	—
			Sones	28.0	27.0	27.0	27.0	26.0	26.0	25.0	25.0	25.0	25.0	24.0	23.0	22.0	21.0

Performance certified is for installation type A: Free inlet, Free outlet. Power rating (BHP) does not include transmission losses. Performance ratings do not include the effects of appurtenances (accessories). The sound ratings shown are loudness values in fan sones at 5 ft. (1.5 m) in a hemispherical free field calculated per AMCA Standard 301. Values shown are for installation type A: Free inlet hemispherical sone levels.