Submitted By: Date:10/30/2025

Blowers

Centrifugal Direct-Drive In-Line Duct Blower



Designed for indoor clean air applications including intake, exhaust, return, or make-up air systems in industrial or commercial buildings. Rugged construction allows fan to be installed in ductwork either horizontally or vertically. Duct collars provide easy duct connections.


- Aluminum backward inclined, nonoverloading centrifugal wheel design
- NEMA 1 junction box included
- Units are speed controllable
- Maximum inlet air temperature: 104° F
- UL/cUL 705 Listed for Power Ventilators

AMCA Sound & Air


Dayton Electric Mfg.
d. certifies that the
blowers shown herein
are licensed to bear the
soundanted sea and procedures
performed in
accordance with AMCA
summers and procedures
performed in
accordance with AMCA
summers and procedures
performed in
accordance with AMCA
summers and procedures
performed in
accordance with AMCA
AMCA Certified Ratings
Program.



CSA Certified Motor

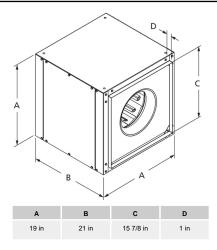

Performance Characteristics

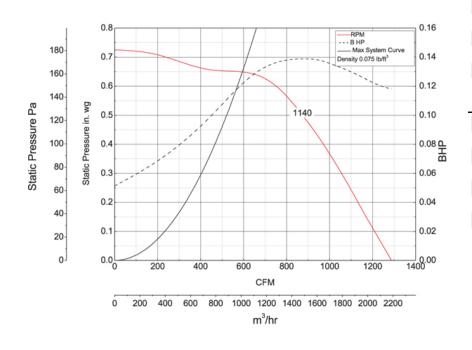

Construction Features

Impeller Diameter (Typ.)	13 1/8 in			
Impeller Type	Backward Inclined Centrifugal			
Impeller Material	Aluminum			
Max Inlet Temp	104 °F			
Warranty Length	1 Year			

Motor Information

Motor Item Number	4YU23		
Voltage	115		
Hertz (Cycle)	60 Hz		
Motor Phase	1		
Motor Enclosure	Open Air-Over		
RPM	1,140 rpm		
Full Load Amps	2.2		

Air & Sound Performance

Motor HP	Max BHP	Fan RPM	CFM @	0.000" SP	0.125" SP	0.250" SP	0.375" SP	0.500" SP	0.625" SP
1/6	0.14	1140	CFM	1287	1189	1094	992	873	692
	0.14	1140	Sones	7.4	7.2	7.0	6.3	5.9	5.8

Performance certified is for installation type B: Free inlet, Ducted outlet. Performance ratings do not include the effects of appurtenances (accessories). The sound ratings shown are loudness values in fan sones at 5 ft. (1.5 m) in a hemispherical free field calculated per AMCA Standard 301. Values shown are for installation type B: Free inlet hemispherical fan sone levels.