




Job Name: Mark: Submitted By: Date:10/30/2025

### Reversible Belt-Drive Exhaust/Supply Fan




Designed for commercial and industrial applications requiring both exhaust and supply air. Construction includes rigid drive frame rails and one-piece motor/bearing plate. Propeller utilizes a six-blade cast aluminum design which provides low sound levels. Fans may be mounted either in the horizontal or vertical positions.

- Variable pitch adjustable motor pulley to optimize fan performance
- Maximum inlet air temperature: 104° F
- 6-Blade heavy-duty cast aluminum propellers



#### **Performance Characteristics**

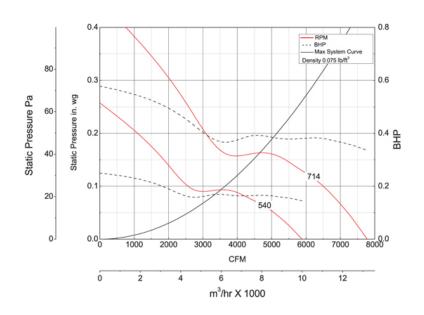

### **Construction Features**

Impeller Diameter (Typ.)	30 in
Impeller Type	Propeller
Impeller Material	Cast Aluminum
Max Inlet Temp	104 °F
Bearing Type	Regreaseable Cast Pillow Block
Drive Package Description	Drives Packaged Separately
Warranty Length	1 Year

#### **Motor Information**

Motor Item Number	4K252
Voltage	115/208-230
Hertz (Cycle)	60 Hz
Motor Phase	1
Motor Enclosure	Open Drip Proof
RPM	1,725 rpm
Full Load Amps	6.6/3.4-3.1

### **Other Components**

Component	Description	Item #
Fan Description	Exhaust/Supply Fan	4YGA3
Belt	4L440 (QTY: 1)	4L440
Driver Sheave	1VP4012	5UHR3
Driven Sheave	AK94	6YRD2
Driven Bushing	QT1	5UHZ2

# **Air & Sound Performance**

Motor HP	Max BHP	Fan RPM	CFM @	0.000" SP	0.125" SP
1/3	0.38	714	CFM	7780	5978
	0.50		Sones	15.9	16.6

Performance is for exhaust fans installation type A: Free inlet, Free outlet. Supply fans performance is approximately 20% less for each horsepower (HP). Power rating (BHP) does not include transmission losses. Performance ratings do not include the effects of appurtenances (accessories). The sound ratings shown are loudness values in fan sones at 5 ft. (1.5 m) in a hemispherical free field. Values are for installation type A: Free inlet sone levels.

# **Operating Range of Drive Package**

Turns Open	FRPM @ 0 TO	FRPM @ 1/2 TO	FRPM @ 1 TO	FRPM @ 1 1/2 TO	FRPM @ 2 TO	FRPM @ 2 1/2 TO	FRPM @ 3 TO	FRPM @ 3 1/2 TO	FRPM @ 4 TO	FRPM @ 4 1/2 TO	FRPM @ 5 TO
Approx. FRPM	714	694	675	655	636	617	598	579	559	540	_