

## Axial Belt-Drive Upblast Exhaust Ventilator




Designed for use in industrial and commercial buildings such as warehouses, manufacturing facilities, foundries, and laboratories. Housing is constructed of heavy gauge galvanized steel. The windband is removable for easy inspection. Lifting lugs are provided.

- Maximum inlet air temperature: 120° F
- UL/cUL 705 Listed for Power Ventilators
- Air handling quality bearings meet minimum of L10-100,000 hours
- Sealed pillow block bearings




Dayton Electric Mfg. Co. certifies that the ventilators shown herein are licensed to bear the AMCA seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirements of the AMCA Certified Ratings Program.

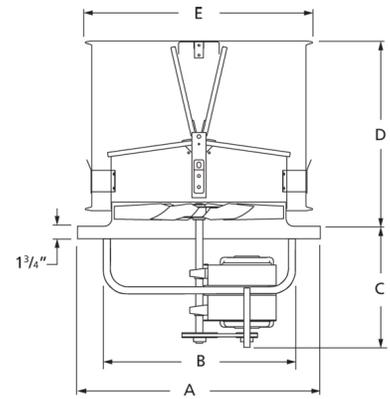

A	B	C	D	E
36 3/8 in	28 3/8 in	16 in	26 in	31 1/8 in

### Performance Characteristics

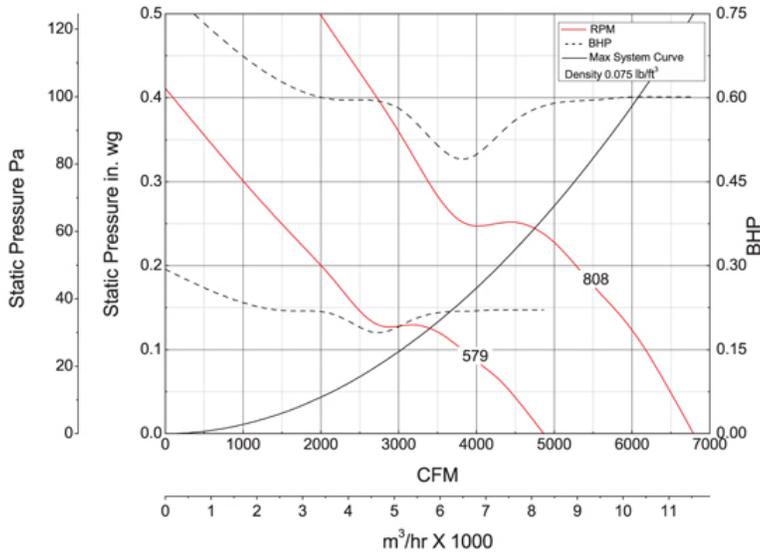

### Construction Features

<b>Impeller Diameter (Typ.)</b>	24 in
<b>Impeller Type</b>	Propeller
<b>Impeller Material</b>	Steel
<b>Max Inlet Temp</b>	120 °F
<b>Bearing Type</b>	Sealed Pillow Block
<b>Drive Package Description</b>	Drives Packaged Separately
<b>Warranty Length</b>	1 Year

### Motor Information

<b>Motor Item Number</b>	31TT08
<b>Voltage</b>	208-230/460
<b>Hertz (Cycle)</b>	60 Hz
<b>Motor Phase</b>	3
<b>Motor Enclosure</b>	Open Drip Proof
<b>RPM</b>	1,725 rpm
<b>Full Load Amps</b>	1.7-1.7/0.85

### Other Components

Component	Description	Item #
Fan Description	Exhaust Fan	—
Belt	A28 (QTY: 1)	6A140
Driver Sheave	1VP3458	5UHR1
Driven Sheave	AK69	6YRD3
Driven Bushing	QT34	5UJA2

### Air & Sound Performance

Motor HP	Max BHP	Fan RPM	CFM @	0.000" SP	0.125" SP
1/2	0.60	808	CFM	6791	5985
			Sones	18.2	16.4

Performance certified is for installation type A: Free inlet, Free outlet. Power rating (BHP) does not include transmission losses. Performance ratings do not include the effects of appurtenances (accessories). The sound ratings shown are loudness values in fan sones at 5 ft. (1.5 m) in a hemispherical free field calculated per AMCA Standard 301. Values shown are for installation type A: Free inlet hemispherical sone levels.

### Operating Range of Drive Package

Turns Open	FRPM @ 0 TO	FRPM @ 1/2 TO	FRPM @ 1 TO	FRPM @ 1 1/2 TO	FRPM @ 2 TO	FRPM @ 2 1/2 TO	FRPM @ 3 TO	FRPM @ 3 1/2 TO	FRPM @ 4 TO	FRPM @ 4 1/2 TO	FRPM @ 5 TO
Approx. FRPM	808	792	765	739	712	685	659	632	605	579	—