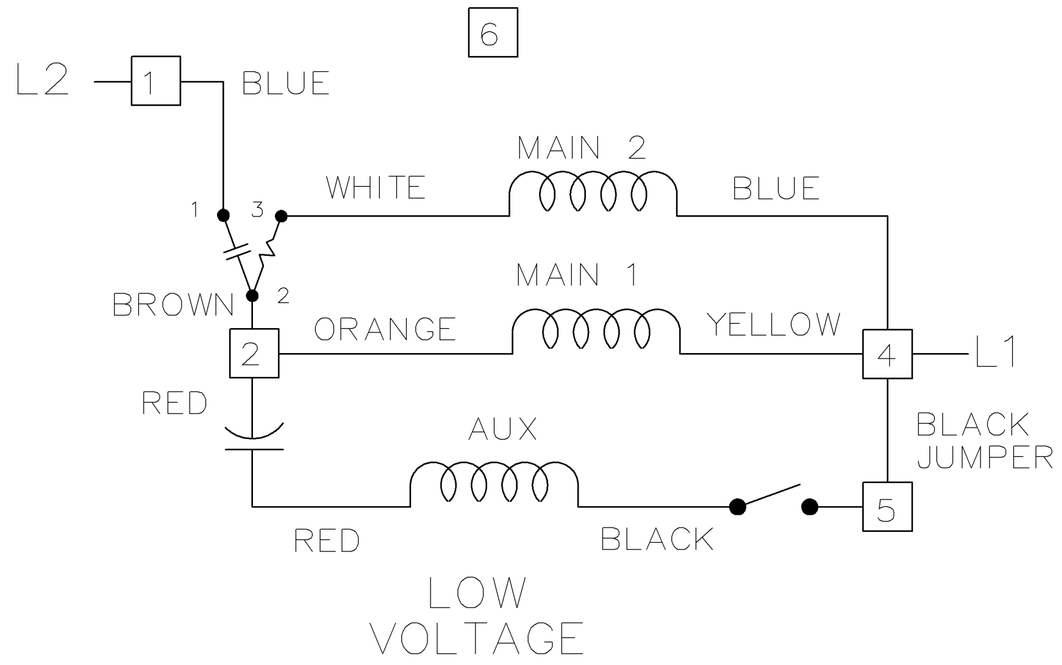

LOW VOLTAGE

DUAL VOLTAGE CAPACITOR START
REVERSIBLE ON TERM BOARD
WITH OVERLOAD PROTECTION

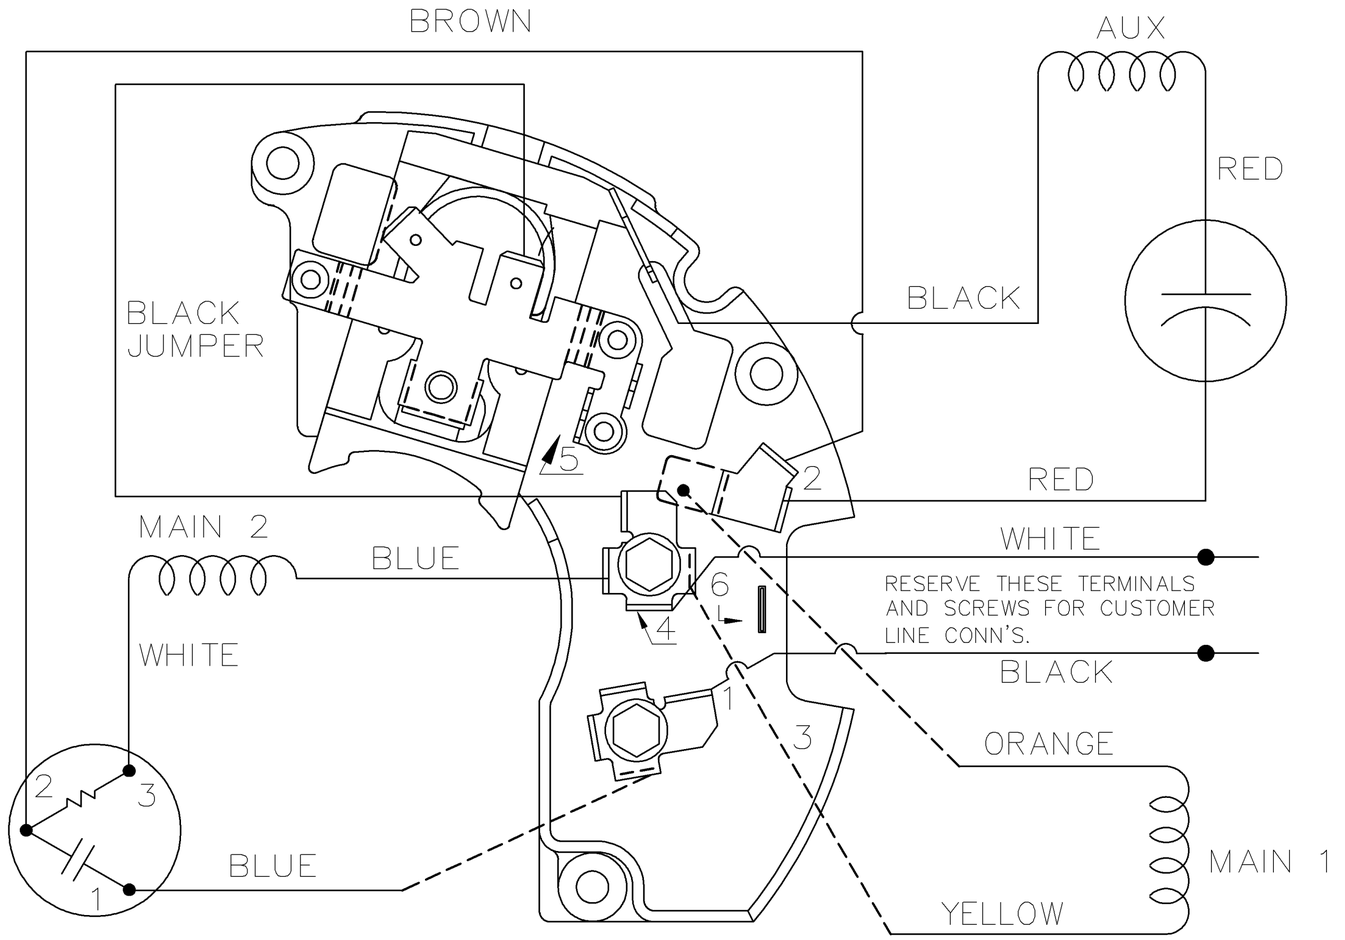

VIEWING SHAFT END

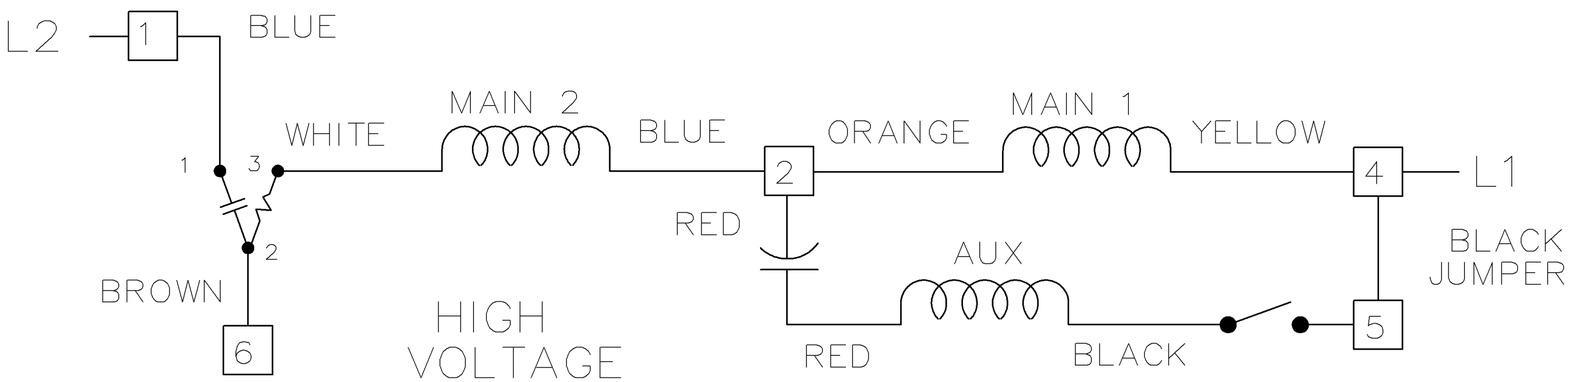

HIGH VOLTAGE

LOW VOLTAGE CW ROTATION SHAFT END SHOWN.

FOR HIGH VOLTAGE
CONNECT BROWN TERM 2 TO TERM 6.
CONNECT BLUE TERM 4 TO TERM 2.

TO REVERSE ROTATION EITHER
VOLTAGE INTERCHANGE RED
LEAD WITH BLACK LEAD.

NO.	REVISION	BY & DATE	CHK

TOLERANCES UNLESS SPECIFIED	
DEC.	INCHES
.X	± –
.XX	± –
.XXX	± –
.XXXX	± –
ANG	± –

Dayton® Dayton Electric Mfg. Co.
5959 West Howard St.
Niles, IL 60714 USA

DRAWN	TAT 05-18-2006
CHK	ML 05-20-2006
APPD	EH 05-22-2006
SCALE	1=1
REF	
FMF	MU72884
PREV	

TITLE CONNECTION DIAGRAM
48 FR. DUAL VOLTAGE REVERSIBLE

MAT'L.

FINISH

THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED
THIS IS AN ELECTRONICALLY GENERATED DOCUMENT – DO NOT SCALE THIS PRINT

RFP 05-22-2006
DIST WP

CAD FILE 1AGG1-WD

SIZE A

DRAWING NO. 1AGG1-WD PAGE OF

REV.